


SALAMANDER

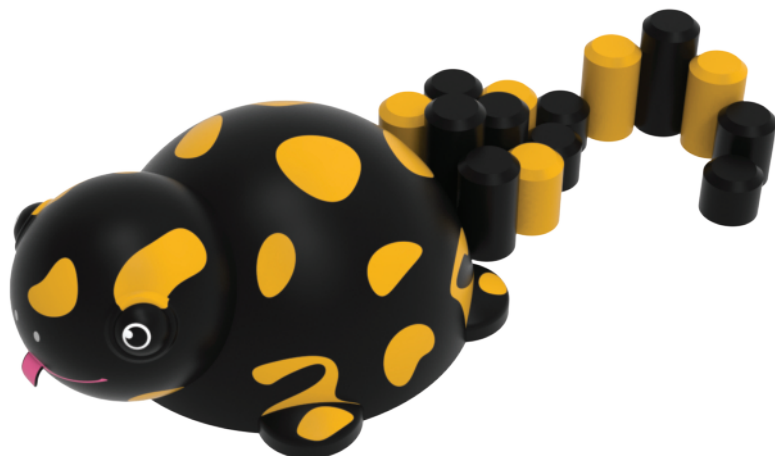

PRODUCT COMPOSITION

S fiberglass shell, SBR, EPDM/TPV, aliphatic PU binder, powder-coated galvanized metal parts, SBR + LECA mix

COLOR COMBINATION

standard: black / ocher / white/ pink
(other combination on request)

COLOR STABILITY

UV stable

RECOMMENDED SAFETY SURFACE

rubber surfacing (min. 1500 mm around the product) or an equivalent shock-absorbing surface compliant with EN1177

PRODUCT SAFETY

certified according to EN1176
complies with ASTM F1487 and CAN/CSA Z614

INSTALLATION


the product is installed onto a concrete foundation

PACKAGING

wrapped in plastic and delivered on a pallet 2100 x 2100 mm

STORAGE

in original packaging on a pallet
in temperatures between - 40° C and 50° C

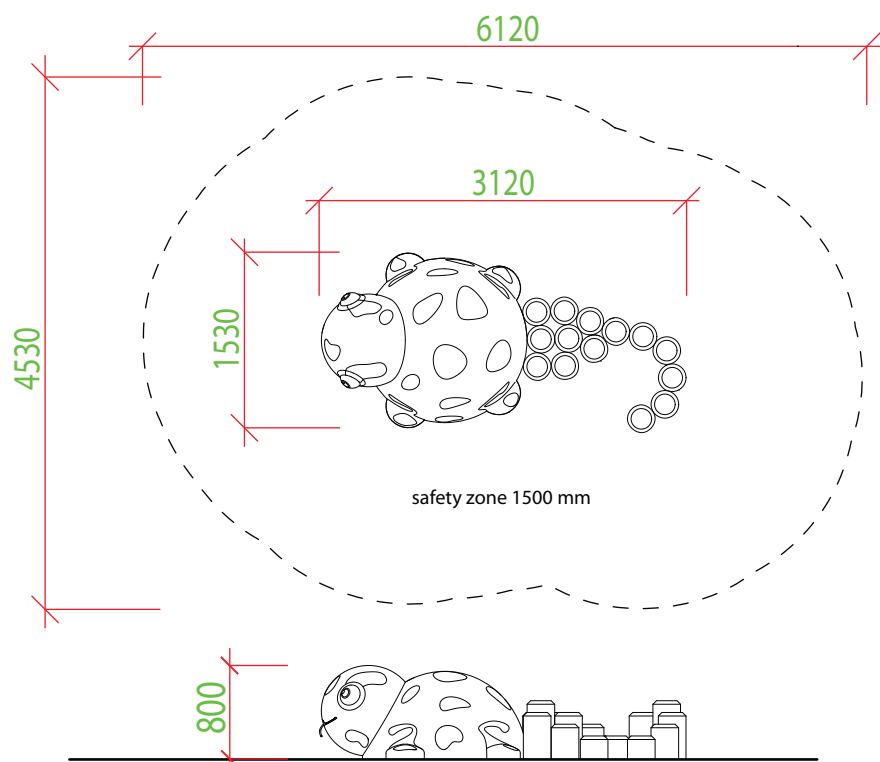

Our products are handmade, please allow dimensional tolerance up to 40 mm

340 kg weight	800 mm critical fall height	2 h assembly time	2 - 10 yrs users' age	5 max. number of users	3120 x 1530 x 800 mm dimensions
------------------	--------------------------------	----------------------	--------------------------	---------------------------	------------------------------------

3D PROGRAM, s.r.o.

Objízdná 1911
Otrokovice 765 02
Czech Republic



MADE IN EU

www.3dprogram.eu
info@3dprogram.eu
+420 602 500 045 +420 577 700 718

