PRODUCT SHEET

B10/26EN

product line **BASIC**

ROCKS

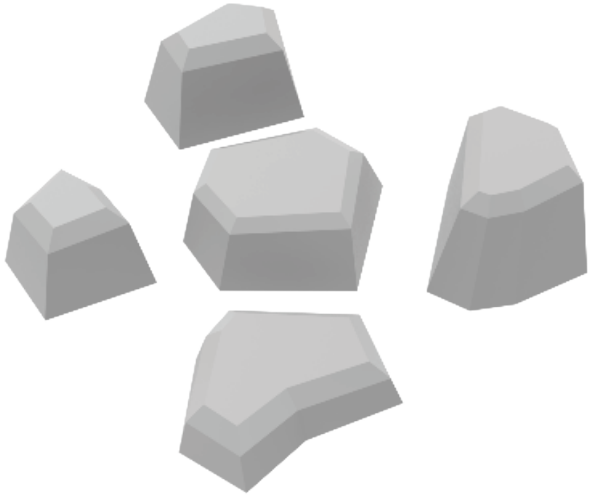

PRODUCT COMPOSITION
EPDM/TPV, aliphatic PU binder,
SBR + LECA mix

COLOR COMBINATION
Standard: grey

COLOR STABILITY
UV stable

RECOMMENDED SAFETY SURFACE
rubber surfacing
(no safety area according to EN1177)

PRODUCT SAFETY
certified according to EN1176
complies with ASTM F1487 and CAN/CSA Z614

INSTALLATION
The product is glued to an SBR | asphalt | concrete base, or cast in place in a concrete foundation.

PACKAGING
wrapped in plastic on a pallet,
sized according to quantity

STORAGE
in original packaging on a pallet
in temperatures between - 40° C and 50° C

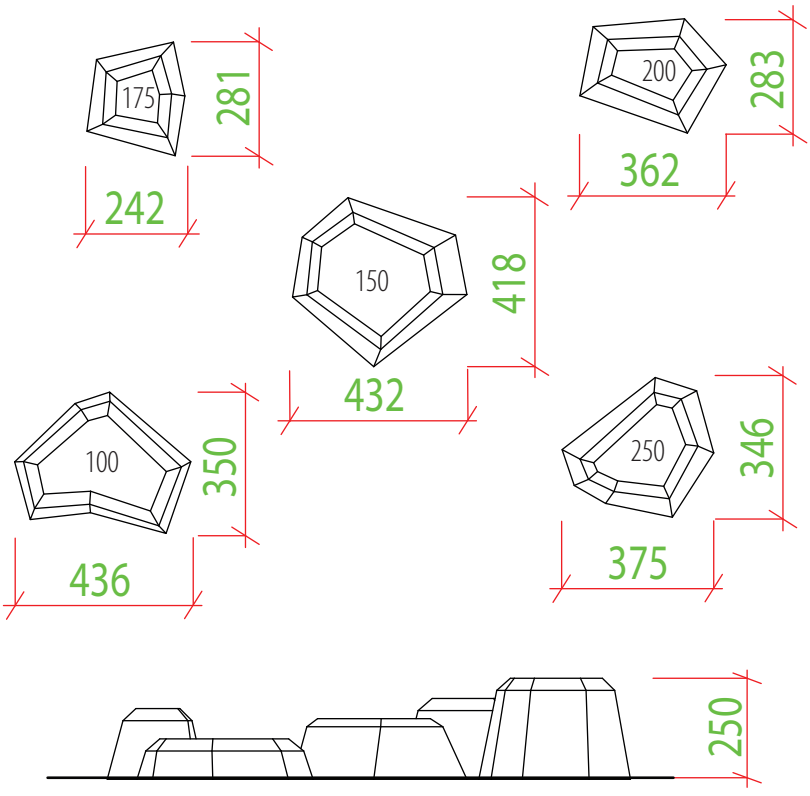

Our products are handmade, please allow dimensional tolerance up to 20 mm

weight	critical fall height	assembly time	users' age	max. number of users	dimensions
7 kg 10 kg 6 kg 8 kg 11 kg	250 mm	1 h	0 - 8 yrs	1	436 x 350 x 100 mm 432 x 418 x 150 mm 242 x 281 x 175 mm 362 x 283 x 200 mm 375 x 346 x 250 mm

3D PROGRAM, s.r.o.
Objízdná 1911
Otrokovice 765 02
Czech Republic

www.3dprogram.eu
info@3dprogram.eu
+420 602 500 045 +420 577 700 718

MADE IN EU

3D PROGRAM®