

ROCK HOPSCOTCH



PRODUCT COMPOSITION

EPDM/TPV, aliphatic PU binder,
SBR + LECA mix

COLOR COMBINATION

Standard: grey, black

COLOR STABILITY

UV stable

RECOMMENDED SAFETY SURFACE

safety rubber surface
(no safety area required according to EN1177)

PRODUCT SAFETY

certified according to EN1176
complies with ASTM F1487 and CAN/CSA Z614

INSTALLATION


The product is glued to an SBR | asphalt | concrete
base, or cast in place in a concrete foundation.

PACKAGING

wrapped in plastic and delivered on a pallet
1400 x 1400 mm

STORAGE

in original packaging on a pallet
in temperatures between - 40° C and 50° C

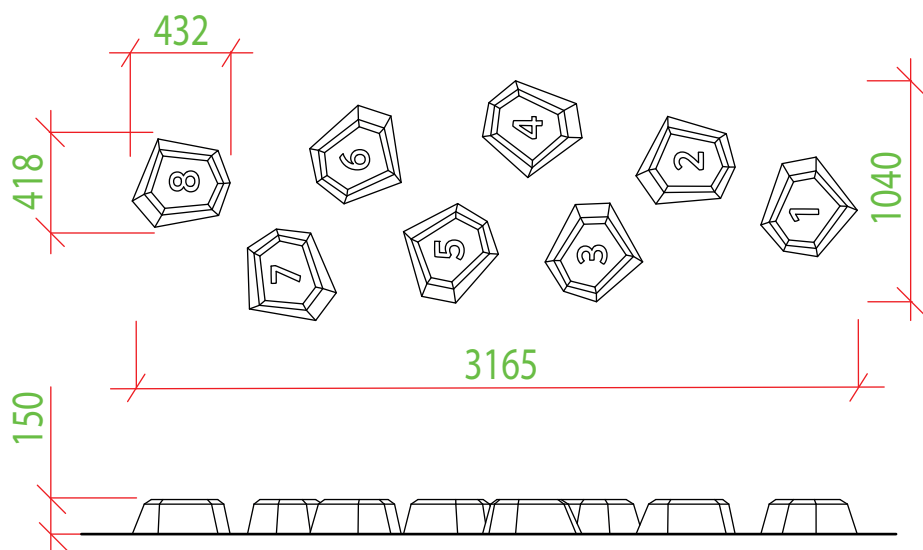

Our products are handmade, please allow dimensional tolerance up to 10 mm

 80 kg	 <600 mm	 1 hr	 0 - 8 yrs	 1	 1 pc 432 x 418 x 150 mm set 3165 x 1040 x 150 mm
weight	critical fall height	assembly time	users' age	max. number of users	dimensions

3D PROGRAM, s.r.o.

Objízdna 1911
Otrokovice 765 02
Czech Republic

www.3dprogram.eu
info@3dprogram.eu
+420 602 500 045 +420 577 700 718



MADE IN EU

