


HILL L

with slide and tube

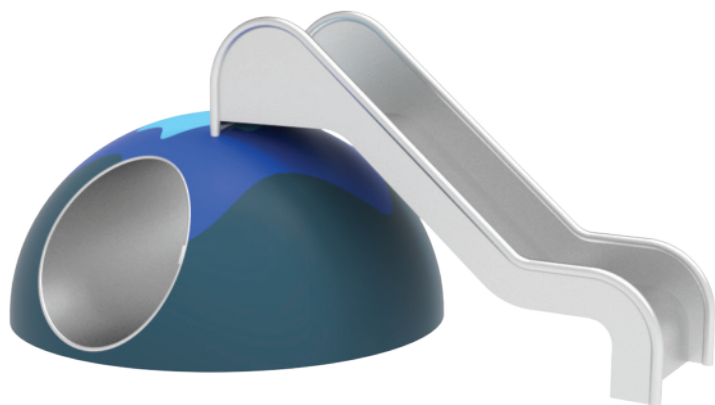

PRODUCT COMPOSITION

fiberglass shell, SBR, EPDM/TPV,
aliphatic PU binder, inox slide,
inox tube

COLOR COMBINATION

standard: dark blue / blue / light blue
(other combination on request)

COLOR STABILITY

UV stable

Product is offered with inox tube Ø460 mm and inox slide

RECOMMENDED SAFETY SURFACE

rubber surfacing (min. 1500 mm around the product)
or an equivalent shock-absorbing surface compliant
with EN1177

PRODUCT SAFETY

certified according to EN1176
complies with ASTM F1487 and CAN/CSA Z614

INSTALLATION


the product is installed onto a concrete foundation

PACKAGING

wrapped in plastic and delivered
on a pallet 1650 x 2100 mm

STORAGE

in original packaging on a pallet
in temperatures between - 40° C and 50° C

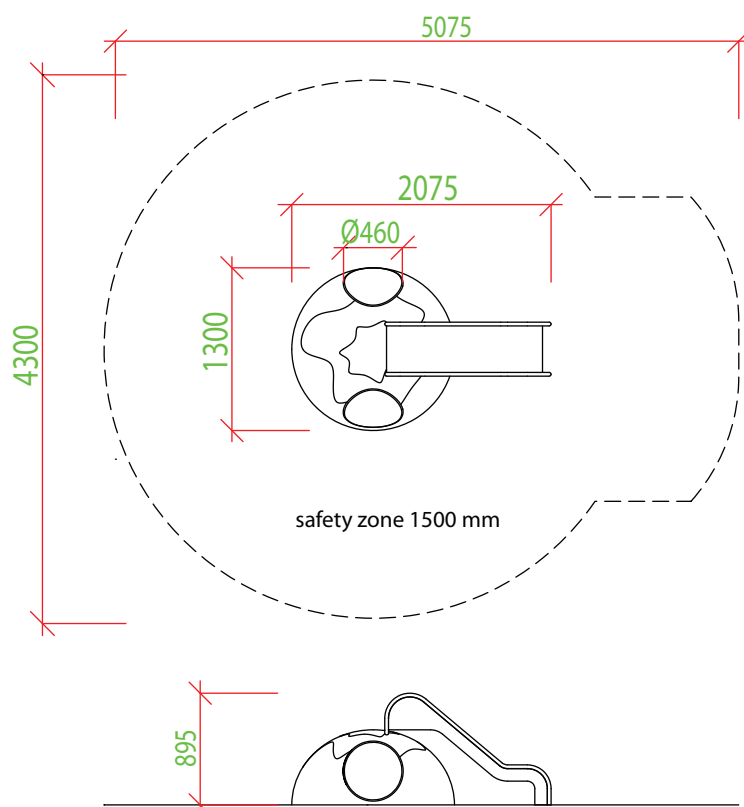

Our products are handmade, please allow dimensional tolerance up to 40 mm

 140 kg weight	 600 mm critical fall height	 1 h assembly time	 2 - 10 yrs users' age	 3 max. number of users	 2075 x 1300 x 895 mm dimensions
--	---	---	---	--	---

3D PROGRAM, s.r.o.

Objízdná 1911
Otrokovice 765 02
Czech Republic



MADE IN EU

www.3dprogram.eu
info@3dprogram.eu
+420 602 500 045 +420 577 700 718

