

# ELEPHANT

with slide

## PRODUCT COMPOSITION


SBR+EPDM rubber granules, aliphatic PU binder, vandal-resistant fiberglass shell, metal parts, stainless steel (opt. PVC) tube, stainless steel (opt. fiberglass) slide, SBR + LECA mixture

## COLOR COMBINATION

standard: grey / black / white / pink  
(other combination on request)

## COLOR STABILITY

UV stable

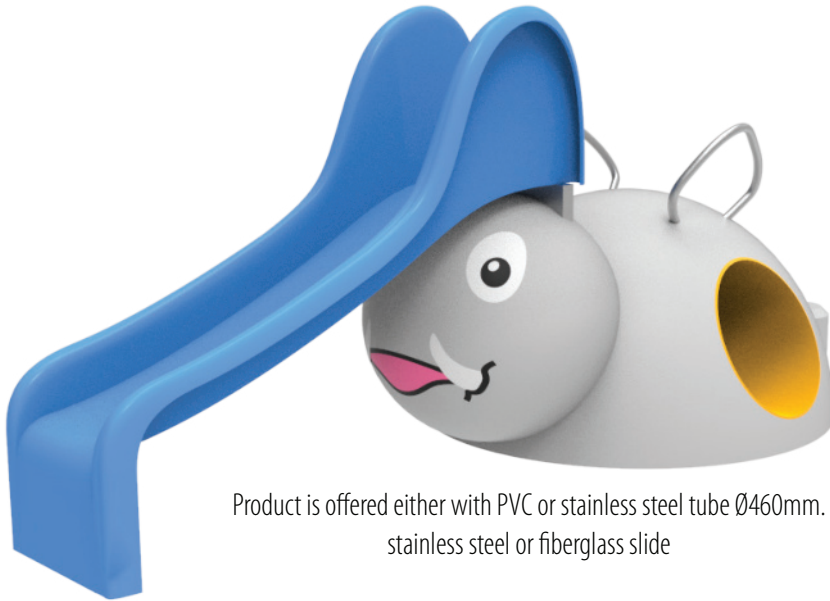

Product is offered either with PVC or stainless steel tube Ø460mm.  
stainless steel or fiberglass slide

## RECOMMENDED SAFETY SURFACE

safety rubber surface  
around the product (according to EN1177)

## PRODUCT SAFETY

certified according to EN1176  
complies with ASTM F1487 and CAN/CSA Z614

## INSTALLATION


the product is installed onto a concrete foundation

## PACKAGING

wrapped in plastic and delivered  
on a pallet 1650 x 2100mm  
+separately packed 2000mm slide

## STORAGE

in original packaging on a pallet  
in temperatures between - 40° C and 50° C

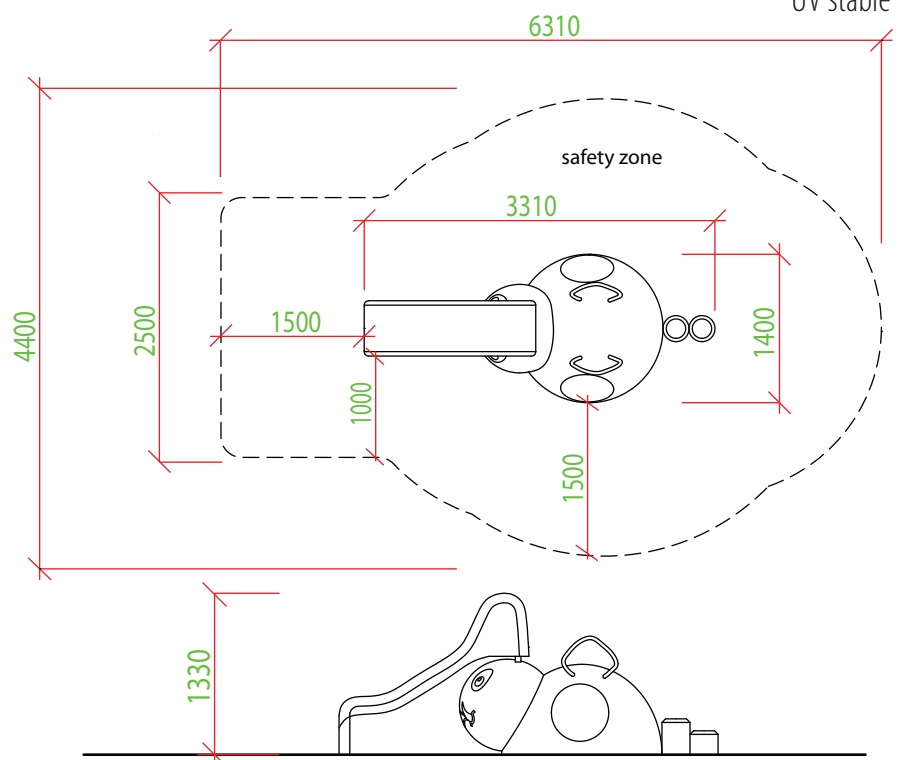

Our products are handmade, please allow dimensional tolerance up to 40 mm

<b>200 kg</b> weight	<b>1330 mm</b> critical fall height	<b>2 hr</b> assembly time	<b>2 - 10 yrs</b> users' age	<b>5</b> max. number of users	<b>1400 x 3310 x 1330 mm</b> dimensions
-------------------------	--	------------------------------	---------------------------------	----------------------------------	--

## 3D PROGRAM, s.r.o.

Objízdná 1911  
Otrokovice 765 02  
Czech Republic



MADE IN EU

www.3dprogram.eu  
info@3dprogram.eu  
+420 602 500 045 +420 577 700 718

