

# OCTOPUS

## PRODUCT COMPOSITION


SBR+EPDM rubber granules, aliphatic PU binder,  
vandal-resistant fiberglass shell, metal parts,  
SBR + LECA mixture

## COLOR COMBINATION

standard: brown / purple / blue/ yellow  
(other combination on request)

## COLOR STABILITY

UV stable

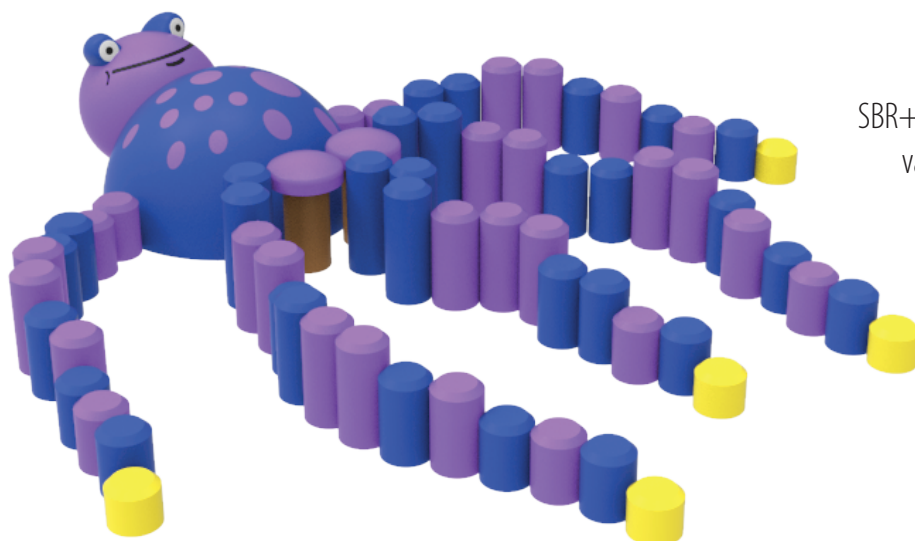

## RECOMMENDED SAFETY SURFACE

safety rubber surface in the area of 1500mm  
around the product (according to EN1177)

## PRODUCT SAFETY

certified according to EN1176  
complies with ASTM F1487 and CAN/CSA Z614

## INSTALLATION



the product is installed onto a concrete foundation

## PACKAGING

wrapped in plastic and delivered  
on two pallets 1650 x 2100mm

## STORAGE

in original packaging on a pallet  
in temperatures between - 40° C and 50° C

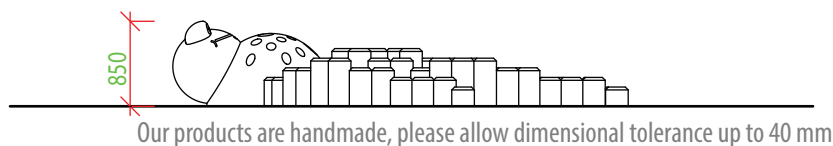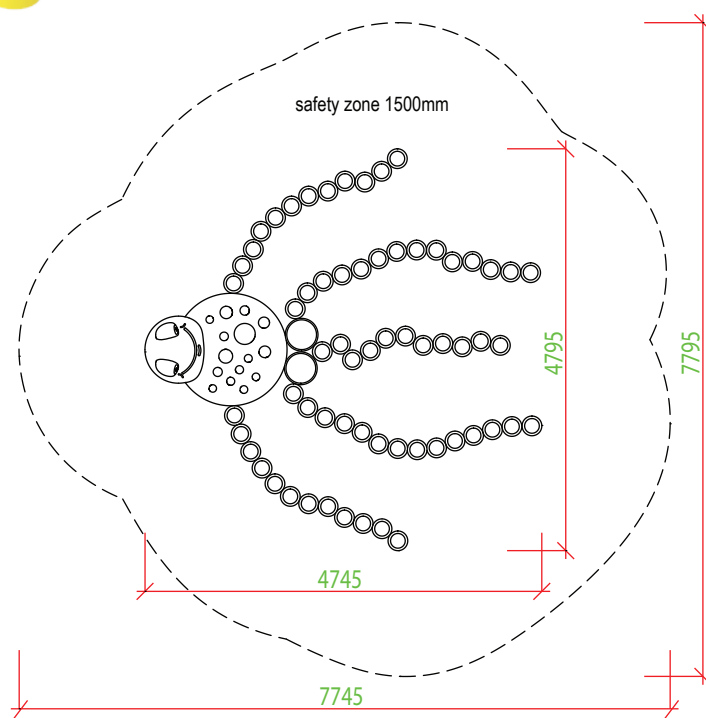

<b>1200 kg</b> weight	<b>850 mm</b> critical fall height	<b>8 hr</b> assembly time	<b>2 - 10 yrs</b> users' age	<b>15</b> max. number of users	<b>4795 x 4745 x 850 mm</b> dimensions
--------------------------	---------------------------------------	------------------------------	---------------------------------	-----------------------------------	---

## 3D PROGRAM, s.r.o.

Objízdná 1911  
Otrokovice 765 02  
Czech Republic



MADE IN EU

www.3dprogram.eu  
info@3dprogram.eu  
+420 602 500 045 +420 577 700 718

