

CAROUSEL



PRODUCT COMPOSITION

fiberglass shell, SBR, EPDM/TPV,
aliphatic PU binder, powder-coated
galvanized metal parts, inox railings

COLOR COMBINATION

standard: light green / blue / yellow / orange
(other combination on request)

COLOR STABILITY

UV stable

RECOMMENDED SAFETY SURFACE

rubber surfacing (min. 1500 mm around the product)
or an equivalent shock-absorbing surface compliant
with EN1177

PRODUCT SAFETY

certified according to EN1176
complies with ASTM F1487 and CAN/CSA Z614

INSTALLATION



the product is installed onto a concrete foundation

PACKAGING

wrapped in plastic and delivered
on a pallet 2100 x 2100 mm

STORAGE

in original packaging on a pallet
in temperatures between - 40° C and 50° C

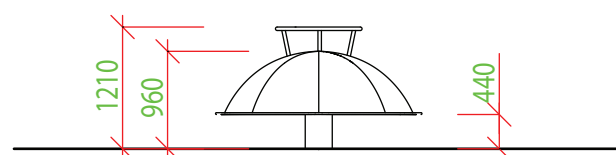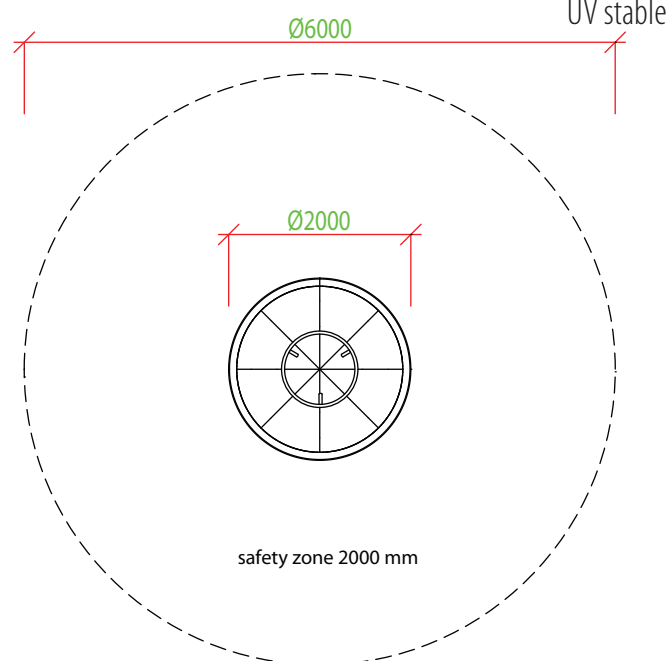

Our products are handmade, please allow dimensional tolerance up to 40 mm

 240 kg weight	 1210 mm critical fall height	 2 h assembly time	 4 - 14 yrs users' age	 3 max. number of users	 Ø 2000 mm h=1210 mm
--	--	---	---	--	--

3D PROGRAM, s.r.o.

Objízdná 1911
765 02 Otrokovice
Czech Republic



MADE IN EU

www.3dprogram.eu
info@3dprogram.eu
+420 602 500 045 +420 577 700 718

