

HILL 400

PRODUCT COMPOSITION


SBR+EPDM rubber granules, aliphatic PU binder, vandal-resistant fiberglass shell

COLOR COMBINATION

standard: teal, yellow

COLOR STABILITY

UV stable

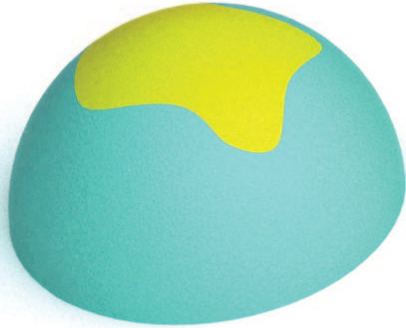

SAFETY SURFACE

no safety area required (according to EN1177)

PRODUCT SAFETY

certified according to EN1176

INSTALLATION


the product is installed onto a concrete foundation

PACKAGING

wrapped in plastic and delivered on a pallet 800 x 800mm

STORAGE

in original packaging on a pallet in temperatures between - 40°C and 50°C

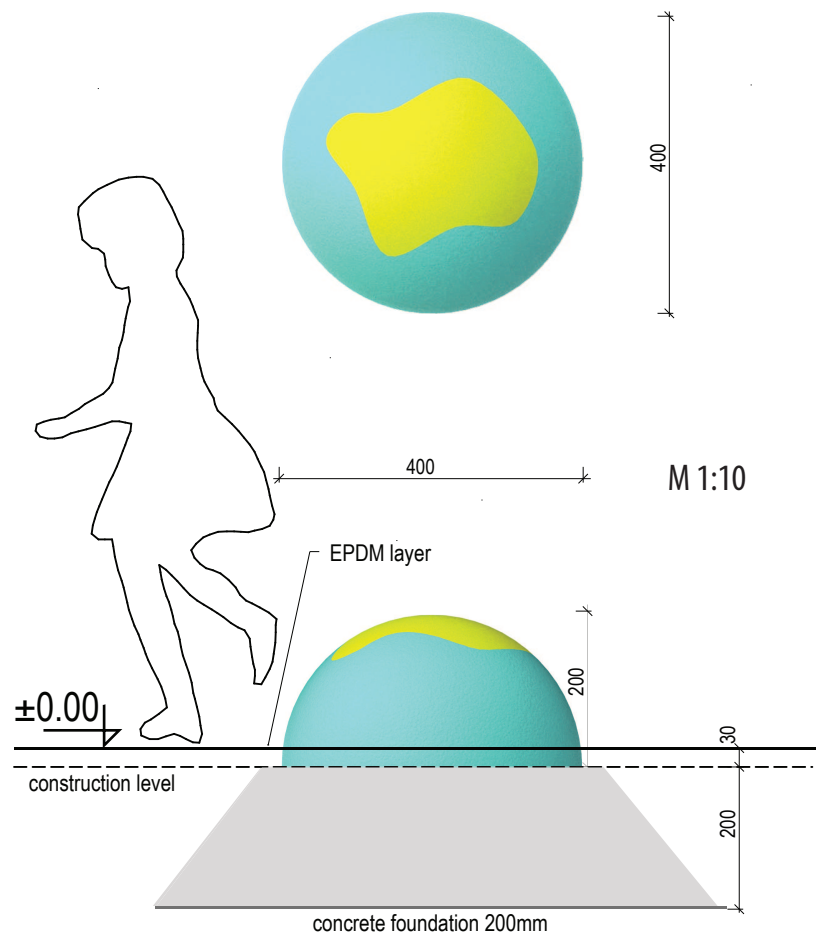

25 kg weight	200 mm critical fall height	1 h assembly time	2 - 8 let users' age	1 max. number of users	Ø400mm v=200mm dimensions
------------------------	---------------------------------------	-----------------------------	--------------------------------	----------------------------------	-------------------------------------

3D PROGRAM, s.r.o.

Objízdná 1911
765 02 Otrokovice
Czech Republic



MADE IN EU

www.3dprogram.eu
info@3dprogram.eu
+420 602 500 045 +420 577 700 718

